

Industrijska čišćenja

Sistemi za industrijska čišćenja standardni kontejneri



- dugogodišnje iskustvo, specijalno dizajnirano za F&B industriju
- krilna vrata na perilicama kašeta Elpress je patentirao 2003 godine
- higijenski dizajn i završna obrada
- jednostavna instalacija
- kvalitetne IE crpke
- senzori za kontrolu potrošnje vode
- maksimalna dostupnost za potrebe čišćenja i održavanja
- dostupnost nekoliko standardnih modela

Sistemi za industrijska čišćenja

kašete, kontejneri i palete



CBL kašeta



E2 kašeta



EPS kašeta



Poelierova kašeta



Euro kolica



Velika kutija



H1 paleta

Sistemi za industrijska čišćenja perilica kašeta



EKW-1500



EKW-2500



EKW-3500



EKW-5000



EKW-6000




EKW-7000

Sistemi za industrijska čišćenja jedinica za sušenje



EAB-ST

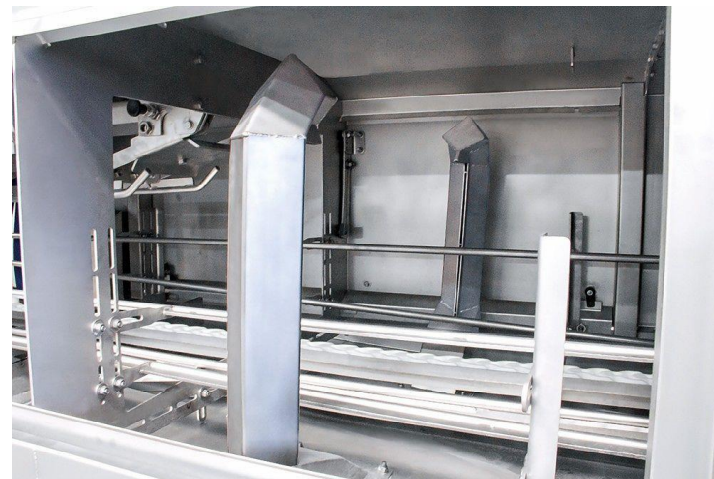

Sistemi za industrijska čiščenja

perilica kolica/kutija/paleta



ENW-20



EDW-20



EPW-45

[illegible]

Sistemi za industrijska čišćenja

standardne perilice kašeta



EKW-1500

- 170 kašeta u satu bazirano na E-kašetama
- Maksimalne dimenzije kašeta mm 600 x 400 x 410 H
- Glavna zona pranja i zona ispiranja
- S transportnim lancem
- Grijanje vode putem struje, injekcije pare ili vrućom vodom
- Upravlja jedna osoba

180 l tank

Potrošnja vode cca. 0.3-0.5 l po kašeti



Sistemi za industrijska čišćenja

standardne perilice kašeta



EKW-2500

- 400 kašeta na sat bazirano na vremenu prolaska od 45 s.
- Maksimalne dimenzije kašeta mm 600 x 400 x 300 H
- Glavna zona pranja i zona ispiranja
- S transportnim lancem
- Grijanje vode putem struje, injekcije pare ili vrućom vodom
- Upravlja jedna osoba



350 l tank

Potrošnja vode cca. 0.3-0.5 l po kašeti



Sistemi za industrijska čišćenja

standardne perilice kašeta



EKW-3500



- 560 kašeta na sat bazirano na vremenu prolaska od 45 s.
- Maksimalne dimenzije kašeta mm 600 x 400 x 300 H
- Glavna zona pranja i zona ispiranja
- S transportnim lancem
- Grijanje vode putem struje, injekcije pare ili vrućom vodom
- Upravlja jedna osoba

350 l tank

Potrošnja vode cca. 0.3-0.5 l po kašeti



Sistemi za industrijska čišćenja

standardne perilice kašeta



EKW-5000

- 800 kašeta u jednom satu bazirano na vremenu prolaska od 45 s.
- Maksimalne dimenzije kašeta mm 600 x 400 x 300 H
- Glavna zona pranja i zona ispiranja
- S transportnim lancem
- Grijanje vode putem struje, injekcije pare ili vrućom vodom
- Upravlja jedna osoba



Pred-ispiranje 350 l tank

Glavno pranje 350 l tank

Potrošnja vode cca. 0.3-

0.5 l po kašeti



Sistemi za industrijska čišćenja

standardne perilice kašeta



EKW-6000

- 960 kašeta u jednom satu bazirano na vremenu prolaska od 45 s.
- Maksimalne dimenzije kašeta mm 600 x 400 x 300 H
- Glavna zona pranja i zona ispiranja
- S transportnim lancem
- Grijanje vode putem struje, injekcije pare ili vrućom vodom
- Upravlja jedna osoba

Pred-ispiranje 350 l tank

Glavno pranje 350 l tank

Potrošnja vode cca. 0.3-

0.5 l po kašeti



Sistemi za industrijska čišćenja

standardne perilice kašeta



EKW-7000



- 1.120 kašeta u jednom satu bazirano na vremenu prolaska od 45 s.
- Maksimalne dimenzije kašeta mm 600 x 400 x 300 H
- Glavna zona pranja i zona ispiranja
- S transportnim lancem
- Grijanje vode putem struje, injekcije pare ili vrućom vodom
- Upravlja jedna osoba

Pred-ispiranje 350 l tank

Glavno pranje 350 l tank

Potrošnja vode cca. 0.3-

0.5 l po kašeti



Sistemi za industrijska čišćenja


standardni tunel za sušenje



EAB-1-ST – EAB-2-ST

- Tunel za ispuhivanje viška vode
- Zračne oštrice učinkovito uklanjanju višak vode s kašeta
- Dodatna opcija nakon standardne EKW perilce kašeta
- Dolaze s dva ili jednim ventilatorom 5,5 kW svaki
- Sve zatvoreno u INOX

Kapacitet ventilatora:
1500m³ pri 6000 Pa

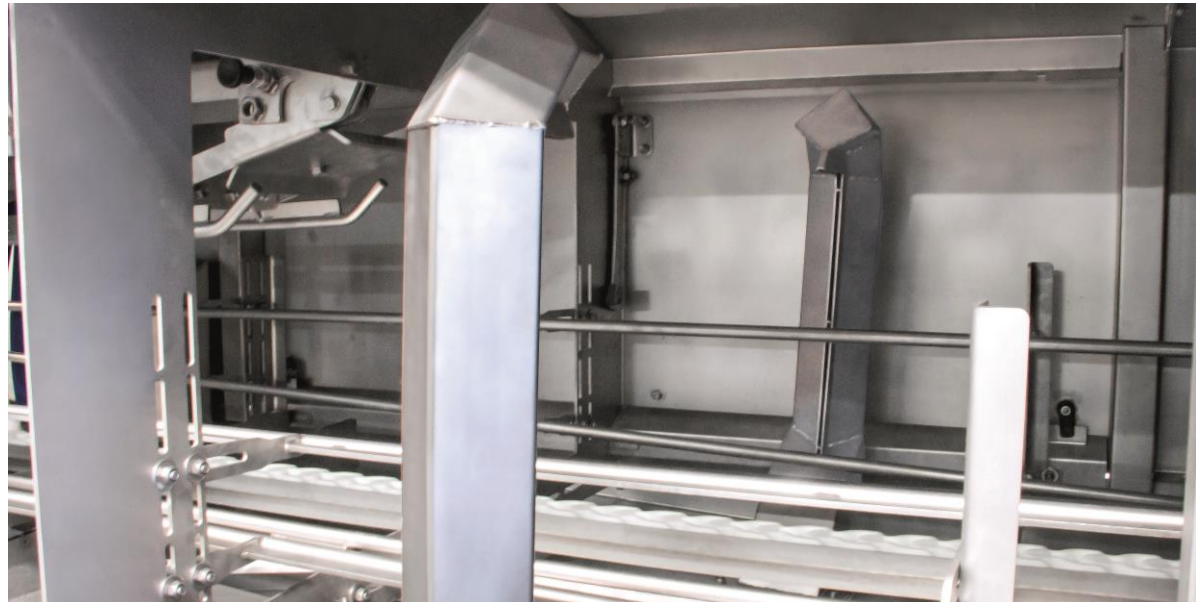

Sistemi za industrijska čišćenja

standardna perilica euro kolica



400 l tank

Potrošnja vode cca. 5 l po jednim kolicima

ENW-20

- kapacitet 20 kolica na sat
- DIN 9797 norma kolica
 - 200 l mm 790 x 675 x 700 H
 - 300 l mm 790 x 675 x 950 H
- Program glavnog pranja i ispiranja



Sistemi za industrijska čišćenja

standardna perilica velikih kutija



EDW-20	EDW-2N	EDW-2N-L
Maks. dimenzije velikih kutija 1200 x 800 x 800 mm 1200 x 1000 x 800 mm Maks. dimenzije norm. kutija 1 kom. 200L DIN 9797 – mm 790x675x700 Potrošnja vode 4-5 l. po ciklusu	Maks. dimenzije velikih kutija 1200 x 800 x 800 mm 1200 x 1000 x 800 mm Maks. dimenzije norm. kutija 1 kom. 200L DIN 9797 – mm 790x675x700 1 kom. 300L DIN 9797 – mm 675x790x950 Potrošnja vode 6-8 l. po ciklusu	Maks. dimenzije velikih kutija 1200 x 800 x 800 mm 1200 x 1000 x 800 mm Maks. dimenzije norm. kutija 1 kom. 200L DIN 9797 – mm 790x675x700 1 kom. 300L DIN 9797 – mm 675x790x950 Potrošnja vode 8-10 l. po ciklusu



20 velikih kutija na sat

Sistemi za industrijska čišćenja

standardna perilica paleta



EPW-45

- Dimenzije paleta:
mm 1200 x 800 x 120 H
mm 1200 x 1000 x 120 H
- Kapacitet 70 paleta na sat
- Zona pranja i ispiranja

280 l tank

Potrošnja vode cca. 6 l po paleti



Sistemi za industrijska čišćenja

standardna perilica raznog pribora



ETW-10	ETW-15	ETW-17	ETW-20	ETW-30
Volumen pranja: mm 690 x 635 x 610 H	Volumen pranja: mm 810 x 635 x 610 H	Volumen pranja: mm 810 x 635 x 640 H	Volumen pranja: mm 1010 x 635 x 645 H	Wash volume: mm 1290 x 635 x 645 H
4 l vode po ciklusu	4 l vode po ciklusu	8 l vode po ciklusu	10 l vode po ciklusu	12 l vode po ciklusu

ETW-10 / 15 / 17 / 20 / 30

- Perilica raznog pribora
- 85°C temperatura ispirne vode
- Podesivi programi pranja



Sistemi za industrijska čišćenja

opcije



Dozirna crpka za sredstvo za
pranje ili ispiranje



Ekstraktor pare



Podesiva brzina
lanca (frekvencijski
kontroler)



Digitalni termometar



Injekcija pare



Zavojnica za vruću vodu



Električni grijač




Pokretna jedinica



Jednostavno
upravljanje



Ulazni i izlazni stol

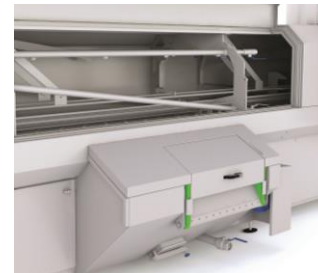

Rotacioni filter



Povećana visina za
kašete do 400 mm